

SD24




Features

- No central power supply required
- Built-in power module
- Pre-wired with 9 foot cable
- Low profile - Surface mount
- Single wire pattern selection
- 24 high intensity LEDs
- 100% Waterproof
- Synchronizable with Hide-A-LEDs
- Available in Amber, Blue, Red and White
- 5 year factory direct warranty

Dimensions

Length: 3.3" Width: 1.1" Height: 0.4"

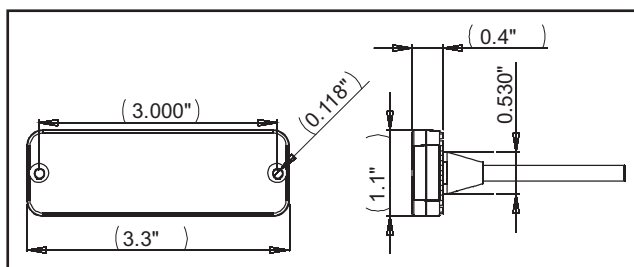

Contents

- (1) SD24 Warning Signal
- (2) Stainless Steel Screws



Specifications

Input Voltage12.8V (10 to 16 vdc)
 Input Current0.75A max
 Cable Length9 FT.
 Flash Patterns:.....16 (8 standard, 8 optional cycle)
 Max number of synchronized heads.....64
 LEDs:24
 Light Output:
 AMBER.....336 Lumens
 BLUE.....120 Lumens
 RED.....360 Lumens
 WHITE.....450 Lumens

Part Number

SD24_

(_) represents first letter of color.

Flash Patterns

STANDARD PATTERNS			
#	Pattern:	Frequency:	Description:
1	Quad Flash	1.25 Hz	75 Quad Flashes Per Minute.
2	Double Flash	1.25 Hz	75 Double Flashes Per Minute.
3	Triple Flash	1.53 Hz	92.3 Triple Flashes Per Minute.
4	DeciBlast	1.42 Hz	85.5 Deci Flashes Per Minute.
5	Single Flash	1.25 Hz	75 Single Flashes Per Minute.
6	Mega Flash	1.90 Hz	114 Single Flashes Per Minute.
7	Triple+Burst	1.37 Hz	82.5 Triple+Burst Flashes Per Minute.
8	Steady On		Steady On.
CYCLE PATTERNS			
9	Cycle All		Cycle through patterns 1 to 7.
10	Double-Triple+Burst		2 Double, 2 Triple+Burst cycle.
11	Cycle Classic		1 Double, 1 Quad, 2 Mega cycle.
12	Quad-Mega		3 Quad, 4 Mega cycle.
13	Single-Quad		2 Single, 2 Quad cycle.
14	DeciBlast-Quad		2 DeciBlast, 2 Quad cycle.
15	Single-Triple-DeciBlast		2 Single, 2 Triple, 2 DeciBlast cycle.
16	Mega-Triple+Burst		1 Mega, 1 Triple+Burst cycle.



36 Doctor Foote Rd.
 Colchester, CT 06415, USA