

Hide-A-LED™

Undercover Warning Signal

W600




○ Colors available: 

FEATURES:

- No central power supply required!
- Split colors
- Mounts in Horizontal and Vertical position
- Hide-A-LEDs and BULL LEDs can be synchronized, any combination, up to a total of 20 heads
- The LEDs are Next Generation; Nova utilizes the latest technology available from the world's top LED manufacturers
- Pre-wired with a 9 foot cable
- UV stabilized polycarbonate lens
- Nickel plated housing
- Low profile mounting flange
- Only one power wire required for typical install
- Mounts in 1 inch hole

Part Number	Description
W6A	Amber, W600 Hide-A-LED
W6R	Red, W600 Hide-A-LED
W6B	Blue, W600 Hide-A-LED
W6G	Green, W600 Hide-A-LED
W6W	White, W600 Hide-A-LED
Split Colors	
W6__ (A,B,G,R,W)	

Split Colors - Two Lights in One!

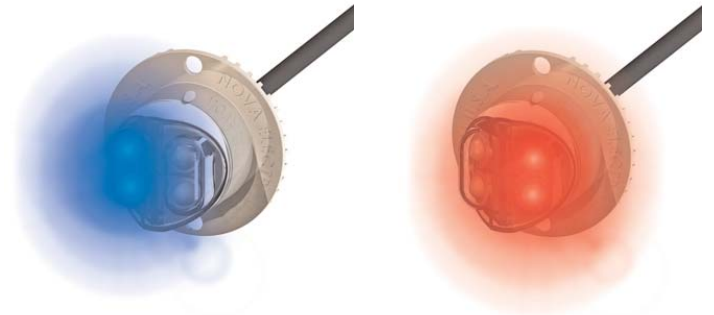

FLASH PATTERNS:

		STANDARD PATTERNS			Standard Pattern Set: 8 Flash patterns that can sync with BULL LED Heads.
#	Pattern:	Frequency:	Description:		
STANDARD ONLY	1	Quad Flash	1.25 Hz	75 Quad Flashes Per Minute.	
	2	Double Flash	1.25 Hz	75 Double Flashes Per Minute.	
	3	Triple Flash	1.53 Hz	92.3 Triple Flashes Per Minute.	
	4	DeciBlast	1.42 Hz	85.5 Deci Flashes Per Minute.	
	5	Single Flash	1.25 Hz	75 Single Flashes Per Minute.	
	6	Mega Flash	1.90 Hz	114 Single Flashes Per Minute.	
	7	Triple+Burst	1.37 Hz	82.5 Triple+Burst Flashes Per Minute.	
	8	Steady On		Steady On.	
		CYCLE PATTERNS			Extended Cycle Pattern Set: Additional 8 Flash patterns.
STANDARD + CYCLE	9	Cycle All		Cycle through patterns 1 to 7.	
	10	Double-Triple+Burst		2 Double, 2 Triple+Burst cycle.	
	11	Cycle Classic		1 Double, 1 Quad, 2 Mega cycle.	
	12	Quad-Mega		3 Quad, 4 Mega cycle.	
	13	Single-Quad		2 Single, 2 Quad cycle.	
	14	DeciBlast-Quad		2 DeciBlast, 2 Quad cycle.	
	15	Single-Triple-DeciBlast		2 Single, 2 Triple, 2 DeciBlast cycle.	
	16	Mega-Triple+Burst		1 Mega, 1 Triple+Burst cycle.	

The W600 warning signals can be synchronized with other W600's and any BULL LED warning signal, up to 20 heads total!

Hide-A-LED™

W600



BUILT-IN POWER MODULE:

- No central power supply required!
- Fits through 1 inch holes
- Waterproof circuitry



WARRANTY: 5 year factory direct

SPECIFICATIONS:

Blue & White & Green	
Input Voltage	10 to 30 Volts DC
Input Current	0.5A @ 12.8, 0.2A @ 25.6V
Light Output	Blue: 155+ Lumens White: 660+ Lumens Green: 660+ Lumens
Red & Amber	
Input Voltage	12.8 Volts (10 to 16 VDC)
Input Current	0.25 Amps
Light Output	Amber: 160+ Lumens Red: 123+ Lumens
* Amber or Red Available in 24V upon request*	
Cable Length	9 feet
LED Elements	4
Flash Patterns	16 (8 Standard, 8 Optional)
Maximum Number of Heads Synchronized	20
Contents	(1) W600 Warning Signal (2) Stainless Steel Screws (1) Gasket

DIMENSIONS:

